

Product datasheet

KOZI S

code : 8042.____.____



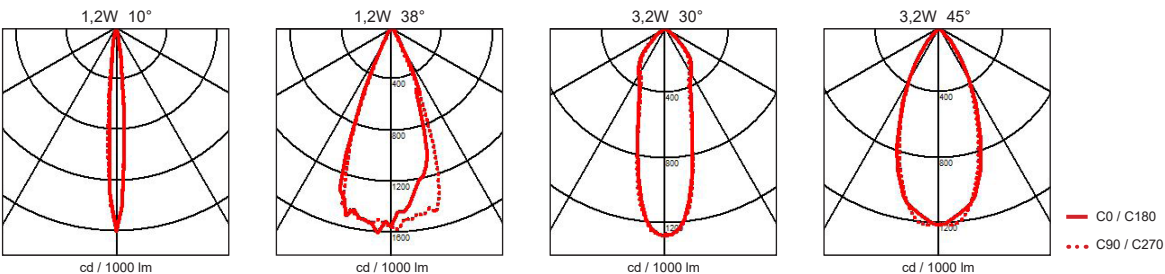
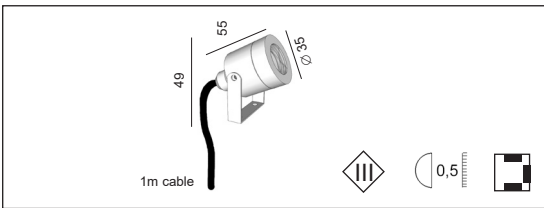
Description

EN Small submersible adjustable led floodlight to use with different accessories as ceiling, wall or floor lighting and allowing the development of the external parts of buildings, the lighting of high humidity areas also.








Degree of protection IP68 - Class 3 - CE
 Driver 350mA constant current not included
 Dimensions: total height: 55mm - diameter: 35mm
 Luminaire made in solid stainless steel, brass, copper or aluminum.
 Stainless steel screws, safety clear glass.
 Colors: 02A - Anodized Black
 04 - Brushed stainless steel
 07 - Brushed brass
 21- Brushed Copper

FR Petit projecteur submersible led orientable à utiliser avec différents accessoires comme éclairage de plafond, de mur ou de sol et permettant l'aménagement des parties extérieures des bâtiments, l'éclairage des zones à forte humidité également.
 Degré de protection IP68 - Classe 3 - CE

Driver 350mA non incorporé
 Dimensions: hauteur totale: 55mm - diamètre: 35mm
 Luminaire fabriqué en inox massif, laiton, cuivre ou aluminium.
 Visserie en inox, verre de sécurité clair.
 Couleurs: 02A - Noir anodisé
 04 - Inox brossé
 07 - Laiton brossé
 21- Cuivre brossé




Accessories

<p>TI._.0.M10A._. Ø 10 mm & M10 Height: 100 / 200 / 500 / 1000mm</p>  <p>Stern A</p>	<p>BASE.060A._. Ø 60 mm & M10 Thickness 5mm</p>  <p>Base 60-A</p>	<p>BASE.100A._. Ø 100 mm & M10 Thickness 5mm</p>  <p>Base 100-A</p>	<p>BASE.060B._. IP65 - Ø 60 mm & M10 Height 40mm + cable gland</p>  <p>Base 60-B</p>
<p>AC.FX01.02A Ø 40 mm & M10 Thickness 15mm</p>  <p>Base Strap</p>	<p>TI._.0.SPK._. Ø 10 mm with Spike for ground fixing Height: 100 / 200 / 500 / 1000mm</p>  <p>Stem B</p>	<p>AC.8042.AG._. Ø 40 mm Height 50mm</p>  <p>Anti-glare 01</p>	

BEL Lighting


The luminaire contains built-in LED lamps



A++

The LED-lamps cannot be changed in the luminaire

874/2012



Product datasheet

KOZI S

code : 8042. _ _ _ . _ _

Product code : Code produit : Produkt-Code :	8042._11 .XX	8042._13 .XX	8042._31 .XX	8042._32 .XX
Power : Puissance : Leistung :	1,2W	1,2W	3,2W	3,2W
*LED colour : couleur : Farbe :	W11 White 2700K° 125lm - 80CRI D11 White 5000K° 145lm - 70CRI	W13 White 2700K° 125lm - 80CRI D13 White 5000K° 145lm - 70CRI	W31 White 2700K° 337lm - 80CRI D31 White 5000K° 381lm - 70CRI	W32 White 2700K° 337lm - 80CRI D32 White 5000K° 381lm - 70CRI
	3000K = on request		3000K / 4000K = on request	
Driver type : Convertisseur : Konverter :	350mA Constant current (not included)	350mA Constant current (not included)	350mA Constant current (not included)	350mA Constant current (not included)
Light diffusion angle ° :	10°	38°	30°	45°
Classification :	CE - IP68 - IK06 Class III	CE - IP68 - IK06 Class III	CE - IP68 - IK06 Class III	CE - IP68 - IK06 Class III
Colour : Couleur : Farbe :	02A Anodized Black 04 Brushed stainless steel 07 Brushed brass 21 Brushed Copper			
Lamp type : Type de lampe : Leuchtentyp :	LED incorporated			
Lifetime / durée de vie :	50 000hrs / 70%			
Material : Matériaux : Material :	Solid stainless steel or brass or copper or aluminum			
Origin : Origine : Herkunft :	Made in Belgium			
Weight:	02A: 0,25kg 04: 0,40kg 07, 21 : 0,80kg			
Dimmable :	yes, with a dimmable driver (1-10V system / DALI / or some other system)			
Adjustable :	yes			
Warranty : Garantie :	2 years + 3 years optional			
Glass type : Type de verre : Glastyp :	Safety clear glass			

*Nos données de puissance pour les luminaires à LED correspondent uniquement à la puissance des LED.
 * Our performance data for LED luminaires are solely the power of LED.
 * Onze prestatiegegevens voor LED-armaturen zijn uitsluitend de power van de LED.
 * Unsere Performance-Daten für LED-Leuchten entsprechen nur der Leistung der LED.

