

Product datasheet

**ZAXOR Led**

2277.\_\_\_\_.16

2278.\_\_\_\_.16



**Description**

**EN** In-ground luminary to be place indoor or outdoor, it uses the latest LED technology. This fixture is resistant to high pressures, up to 2140kg. Extremely robust construction, this quality luminary is manufactured by machining process. ZAXOR Led combines high efficiency and long life.

Degree of protection IP67 - IK10 - max. 2140kg  
 CE - Class 1 (230V) or class 3 (350mA / 500mA / 700mA)  
 Dimmable power supply 220-240V AC included on model 2278.  
 An Junction box IP68 (ref: X082) is available as accessory.  
 An plastic PVC recessed Box (ref: X055B) is available as accessory.

Coverplate: a large selection of coverplates is available (also customizable)  
 With 1m cable - By request, the cable length can be changed.

- Luminaire made of anodized solid aluminum (serie 6000)
- coverplates 4mm thickness made of stainless steel 316L
- stainless steel screws & spring
- touchable extra clear glass feature (10mm thickness)

Without driver (350mA - 500mA - 700mA)  
 code : 2277...

∅ 100mm  
 min: 100mm

**3.2W . 6.5W or 9.5W**

46  
25  
∅ 99

∅ 100mm  
 min: 100mm

**16.5W or 24W**

96  
1m cable  
∅ 99

IK10  
IP67  
CE

**FR** Projecteur à encastrer dans le sol pour l'intérieur ou l'extérieur, il utilise la dernière technologie led. Ce luminaire résiste à des pressions élevées jusqu'à 2140kg. Construction extrêmement robuste de haute qualité, Zaxor Led est fabriqué par procédé d'usinage. ZAXOR Led combine une haute efficacité et une longue durée de vie.

Degré de protection IP67 - IK10 - max. 2140kg  
 CE - Classe 1 (230V) ou classe 3 (350mA / 500mA / 700mA)  
 Alimentation graduable 220-240V AC incluse pour le modèle 2278.  
 Un boîtier de connexion IP68 (ref: X082) est disponible en accessoire.  
 Un tube d'encastrement en PVC (ref: X055B) est disponible en accessoire.

Plaques: un large choix de plaques est disponible (aussi personnalisable)  
 Livré avec 1m de câble - Sur demande, le câble peut être plus long.

- Luminaire fabriqué en aluminium massif anodisé (série 6000)
- plaques épaisseur 4mm en inox 316L
- Visserie et clips en inox
- verre extra clair touchable (épaisseur 10mm)

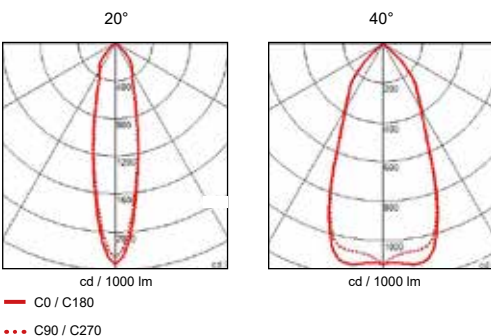
Driver 220-240V incorporated  
 code : 2278...

**3.2W . 6.5W or 9.5W**

92  
25  
∅ 99

∅ 100mm  
 min: 145mm

IK10  
IP67  
CE



**BEL Lighting**

The luminaire contains built-in LED lamps



















The LED-lamps cannot be changed in the luminaire

874/2012

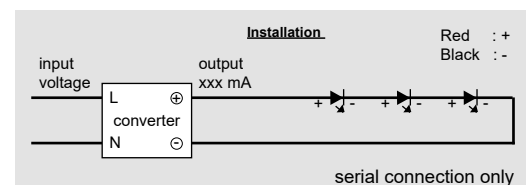
Product datasheet

**ZAXOR Led**

2277.\_.\_.\_.16

Product code : Code produit : Produkt-Code :	2277._0_._._	2277._1_._._	2277._2_._._	2277._3_._._	2277._4_._._												
Power : Puissance : Leistung :	3,2W	6,5W	9,5W	16,5W	24W												
*LED colour : couleur : Farbe :	<b>W0</b> White 2700K° 337lm - 80 CRI  <b>D0</b> White 5000K° 381lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W1</b> White 2700K° 807lm - 80CRI  <b>D1</b> White 5000K° 959lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W2</b> White 2700K° 1215lm - 80CRI  <b>D2</b> White 5000K° 1443lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W2</b> White 2700K° 2196lm - 80CRI  <b>D2</b> White 5000K° 2609lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W2</b> White 2700K° 3070lm - 80CRI  <b>D2</b> White 5000K° 3650lm - 70CRI  <b>3000K &amp; 4000K on request</b>												
Driver type : Convertisseur : Konverter :	Driver 350mA constant current (not included)	Driver 350mA constant current (not included)	Driver 350mA constant current (not included)	Driver 500mA constant current (not included)	Driver 700mA constant current (not included)												
Voltage:																	
Light diffusion angle ° :	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°												
Classification :	CE - IP67 - IK10 Class III	CE - IP67 - IK10 Class III	CE - IP67 - IK10 Class III	CE - IP67 - IK10 Class III	CE - IP67 - IK10 Class III												
Colour : Couleur : Farbe :	<b>1.16</b> Round d.110mm <b>3.16</b> Round d.125mm <b>4.16</b> Square 110x110mm <b>6.16</b> Square 125x125mm <b>A.16</b> Round d.150mm <b>B.16</b> Square 150x150mm <table border="0" style="margin-left: 20px;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>code : 1.16</td> <td>code : 3.16</td> <td>code : A.16</td> <td>code : 4.16</td> <td>code : 6.16</td> <td>code : B.16</td> </tr> </table>											code : 1.16	code : 3.16	code : A.16	code : 4.16	code : 6.16	code : B.16
																	
code : 1.16	code : 3.16	code : A.16	code : 4.16	code : 6.16	code : B.16												
Lamp type : Type de lampe : Leuchtentyp :	LED incorporated																
Lifetime / durée de vie :	50 000hrs / 70%																
Material : Matériaux : Material :	Body: Solid anodised aluminum Coverplate: Stainless steel 316L																
Origin : Origine : Herkunft :	Made in Belgium																
Weight:	0,80kg																
Dimmable :	yes, with a dimmable driver on request ( 0-10V system / DALI / or some other system)																
Adjustable :	no																
Warranty : Garantie :	2 years + 3 years optional																
Glass type : Type de verre : Glastyp :	Safety extra clear glass																







\*Nos données de puissance pour les luminaires à LED correspondent uniquement à la puissance des LED.  
 \* Our performance data for LED luminaires are solely the power of LED.  
 \*Onze prestatiegegevens voor LED-armaturen zijn uitsluitend de power van de LED.  
 \* Unsere Performance-Daten für LED-Leuchten entsprechen nur der Leistung der LED.



Product datasheet

**ZAXOR Led**

2278.\_ \_ \_ \_ .16

Product code : Code produit : Produkt-Code :	2278._ 0 _ _ _ _	2278._ 1 _ _ _ _	2278._ 2 _ _ _ _				
Power : Puissance : Leistung :	3,2W	6,5W	9,5W				
*LED colour : couleur : Farbe :	<b>W0</b> White 2700K° 337lm - 80 CRI  <b>D0</b> White 5000K° 381lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W1</b> White 2700K° 807lm - 80CRI  <b>D1</b> White 5000K° 959lm - 70CRI  <b>3000K &amp; 4000K on request</b>	<b>W2</b> White 2700K° 1215lm - 80CRI  <b>D2</b> White 5000K° 1443lm - 70CRI  <b>3000K &amp; 4000K on request</b>				
Driver type : Convertisseur : Konverter :	Dimmable power supply 220-240V included	Dimmable power supply 220-240V included	Dimmable power supply 220-240V included				
Voltage:	220V-240V AC / 50-60Hz	220V-240V AC / 50-60Hz	220V-240V AC / 50-60Hz				
Light diffusion angle ° :	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°	<b>1:</b> 20° <b>3:</b> 40°				
Classification :	CE - IP67 - IK10 Class I	CE - IP67 - IK10 Class I	CE - IP67 - IK10 Class I				
Colour : Couleur : Farbe :	<b>1.16</b> Round d.110mm <b>3.16</b> Round d.125mm <b>4.16</b> Square 110x110mm <b>6.16</b> Square 125x125mm <b>A.16</b> Round d.150mm <b>B.16</b> Square 150x150mm	 code : 1.16	 code : 3.16	 code : A.16	 code : 4.16	 code : 6.16	 code : B.16
Lamptype : Type de lampe : Leuchtentyp :	LED incorporated						
Lifetime / durée de vie :	50 000hrs / 70%						
Material : Matériaux : Material :	Body: Solid anodised aluminum Coverplate: Stainless steel 316L						
Origin : Origine : Herkunft :	Made in Belgium						
Weight:	1,10kg						
Dimmable :	yes ( Trailing-edge and leading-edge dimming )						
Adjustable :	no						
Warranty : Garantie :	2 years + 3 years optional						
Glass type : Type de verre : Glastyp :	Safety extra clear glass						

\*Nos données de puissance pour les luminaires à LED correspondent uniquement à la puissance des LED.

\* Our performance data for LED luminaires are solely the power of LED.

\*Onze prestatiegegevens voor LED-armaturen zijn uitsluitend de power van de LED.

\* Unsere Performance-Daten für LED-Leuchten entsprechen nur der Leistung der LED.